

Technical Data Sheet

CODE 70572

MICROSOL 1000-V0

Compact wall-mounted convector heaters




Certifications



TECHNICAL AND PERFORMANCE DATA

| | | | |
|--------------------------|------|------------------|-----|
| Absorbed Current max (A) | 4,3 | Insulation Class | I° |
| Absorbed Power max (W) | 1000 | IP | X4 |
| Frequency (Hz) | 50 | Voltage (V) | 230 |
| | | Weight (Kg) | 3,2 |

DIMENSIONS

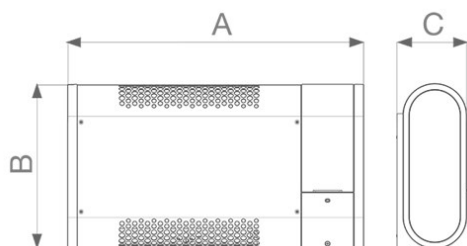

| | |
|-------------|-----|
| Size A (mm) | 573 |
| Size B (mm) | 258 |
| Size C (mm) | 109 |

PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)

Pre & Post Vendita: fax +39 02 90699302

Email prevendita: prevendita@vortice-italy.com

Technical Data Sheet

CODE 70572

MICROSOL 1000-V0

Compact wall-mounted convector heaters



DESCRIPTION

- Front and rear panels, top and bottom grilles made of steel with scratch-resistant paint finish, colour grey.
- Ends and section housing controls made of self-extinguishing plastic rated V0, colour grey.
- Metal-clad heating element with aluminium heat sink; 2 heat output settings: 500/1000 W.
- Thermal overload cutout with manual reset.
- Luminous switches for on/off control and selection of heat output settings.
- Manually adjustable room thermostat with antifreeze function guaranteeing automatic activation of the heater whenever ambient temperature drops below 5 °C.
- The product can be connected to an external programmable thermostat
- IMQ safety certification.

PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)

Pre & Post Vendita: fax +39 02 90699302

Email prevendita: prevendita@vortice-italy.com