

Technical Data Sheet

CODE 25022

VORTRONIC 35 RF

Air cleaners + ionisers with electronically controlled electrostatic cell




Certifications



TECHNICAL AND PERFORMANCE DATA

Absorbed Current max (A)	0,27	Weight (Kg)	3,7
Absorbed Power max (W)	30	Sound power Lw [dB(A)] - min speed	40
Frequency (Hz)	50	Sound power Lw [dB(A)] - max speed	54
Insulation Class	II°	Sound power Lw [dB(A)] - mid speed	49
Max. absorbed power at max speed (W)	30	Sound pressure level Lp [dB (A)] 3m - max speed	39,3
Recommended Room Size (m ³)	35	Sound pressure level Lp [dB (A)] 3m - mid speed	34,9
Voltage (V)	230	Sound pressure level Lp [dB (A)] 3m - min speed	26,3

DIMENSIONS

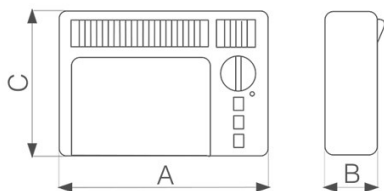

Size A (mm)	420
Size B (mm)	120
Size C (mm)	315

PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)

Pre & Post Vendita: fax +39 02 90699302

Email prevendita: prevendita@vortice-italy.com

Technical Data Sheet

CODE 25022

VORTRONIC 35 RF

Air cleaners + ionisers with electronically controlled electrostatic cell



DESCRIPTION

- Casing, filter cover, sides, grille and base moulded from impact-resistant thermoplastic material, colour light grey.
- 3 speed motor with thermal overload protection and double extension shaft turning in self-lubricating bushings, coupled to 2 impellers made of thermoplastic material; vibration eliminated by rubber dampers located between motor and mounting.
- Washable polyester-polyurethane prefilter.
- Electrostatic double layer filter impregnated with activated carbon.
- Ionizing electrodes selectable by means of a switch located on the top of the casing
- On/off switch.
- Fan speed controlled by 3-position rotary switch.
- Power cord with moulded plug.
- IMQ safety certification.

PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)

Pre & Post Vendita: fax +39 02 90699302

Email prevendita: prevendita@vortice-italy.com