

# Technical Data Sheet

CODE 11321

## M 120/5" A

Wall/window axial fans



### Certifications



IMQ



CE



IMQ Performance



CCC



EAC




G-Mark

### TECHNICAL AND PERFORMANCE DATA

|   |            |                                     |         |
|---|------------|-------------------------------------|---------|
| Absorbed Current max (A)                              | 0,12       | Ø Discharge Hole (mm)               | 119     |
| Absorbed Power max (W)                                | 20         | Voltage (V)                         | 220-240 |
| Frequency (Hz)  | 50         | Weight (Kg)                         | 0,8     |
| Inlet   | Automatico | Delivery max (l/s)                  | 48,6    |
| Insulation Class                                      | II°        | Delivery max (m³/h)                 | 175     |
| IP  | X4         | Pressure max (mmH2O)                | 4,5     |
| Max ambient temperature for continuous operation (°C) | 50         | Pressure max (Pa)                   | 44      |
| Nominal Diameter (mm)                                 | 120        | RPM                                 | 2100    |
|   |            | Sound Pressure level Lp [dB (A)] 3m | 39,5    |

### DIMENSIONS

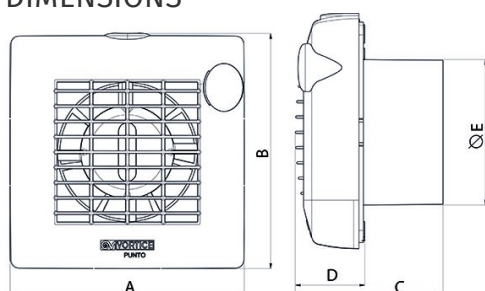

|             |       |
|-------------|-------|
| Size A (mm) | 179   |
| Size B (mm) | 181   |
| Size C (mm) | 110   |
| Size D (mm) | 47    |
| Size E (mm) | Ø 119 |

#### PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)

Pre & Post Vendita: fax +39 02 90699302

Email prevendita: [prevendita@vortice-italy.com](mailto:prevendita@vortice-italy.com)

# Technical Data Sheet

CODE 11321

## M 120/5" A


Wall/window axial fans



### DESCRIPTION

- Material: UV resistant plastic (prevents ageing caused by exposure to sunlight).
- Nominal diameter 120 mm.
- Motor protected against thermal overload, with shaft turning in self-lubricating bushings, coupled to screw type thermoplastic impeller with wing profile blades.
- Maximum air flow: 175 m<sup>3</sup>/h.
- Equipped with system by which the louvres of the grille are opened and closed automatically.
- IMQ SAFETY and IMQ PERFORMANCE certifications.

### CURVES

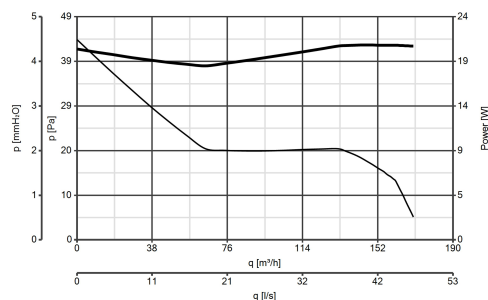

### ACCESSORIES



**F 120/5"**  
Code 22132



**S 120/5**  
Code 22155



**C 1.5**  
**(COMANDO EL.**  
**1.5 A)**  
Code 12966



**SCNRB**  
**SCAT.COM.NON**  
**REV.INCASSO**  
Code 12971

#### PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)

Pre & Post Vendita: fax +39 02 90699302

Email prevendita: [prevendita@vortice-italy.com](mailto:prevendita@vortice-italy.com)