

# Technical Data Sheet

CODE 61101

**NORDIK 1S/L 120/48 SENZA  
GR.COM.**



Ceiling fans with or without light



## Certifications



IMQ



CE




EAC

## TECHNICAL AND PERFORMANCE DATA

Absorbed Current max (A)	0,730	Airflow speed at max speed (m/s)	2,02
Absorbed Power max (W)	175	Delivery max (m <sup>3</sup> /h)	11820
Blades diameter	120	Delivery max (m <sup>3</sup> /min)	197,00
Frequency (Hz)	50	giri_minuto	205
Insulation Class	I°	RPM	205
Voltage (V)	220-240	Service value (m <sup>3</sup> /min)/W	0,895
Weight (Kg)	6,5	Sound power level Lw [dB(A)]	49,1

## DIMENSIONS

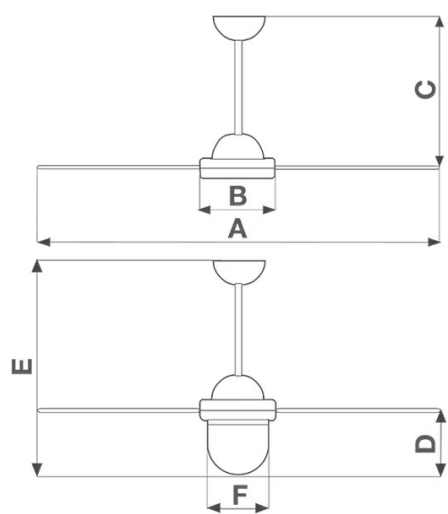

con DECOR LIGHT KIT

Size A (mm)	∅
	1218
Size B (mm)	∅ 230
Size C (mm)	495
Size D (mm)	190
Size E (mm)	685
Size F (mm)	∅
	208

### PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)

Pre & Post Vendita: fax +39 02 90699302

Email prevendita: [prevendita@vortice-italy.com](mailto:prevendita@vortice-italy.com)

# Technical Data Sheet

CODE 61101

## NORDIK 1S/L 120/48 SENZA GR.COM.



Ceiling fans with or without light

### DESCRIPTION

- Top and bottom motor covers moulded from heat-resistant and UV-resistant thermoplastic resin (ABS), colour white
- Wiring connections at end of ceiling rod concealed by domes moulded from impact- and UV-resistant PP, colour white.
- Nominal diameter of blades 1200 mm.
- Single phase start capacitor motor with external rotor, and shaft turning in ball bearings.
- Maximum air flow 11,820 m<sup>3</sup>/h
- 3 galvanized sheet steel blades powder coated with scratch-resistant polyester, colour white
- Steel ceiling rod with polyester powder coated finish, colour white, length 375 mm
- Bag of accessories containing nuts and bolts required for assembly of blades, ceiling hook and rubber anti-vibration washer.
- Globe lampshade of laminated glass, colour opaline; E27 screw holder for lamp rated 150W max, or equivalent energy saving lamp with E27 fitting, mandatory in EU.
- Speed selectable by way of control units with on/off light switch or Telenordik 5T remote control (optional)

### ACCESSORIES



← **SCNRL5 UNIF. X  
NK SOFFITTO**  
Code 12957



**KIT SCB5  
(TRASF.5 V.)**  
Code 22483



**TELENORDIK 5T**  
Code 22387



**C 2.5  
(COMANDO EL.  
2.5 A)**  
Code 12967 →

#### PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)  
Pre & Post Vendita: fax +39 02 90699302  
Email prevendita: [prevendita@vortice-italy.com](mailto:prevendita@vortice-italy.com)