

Technical Data Sheet

CODE 26026

DEUMIDO 14 EVO

Portable dehumidifiers




Certifications



TECHNICAL AND PERFORMANCE DATA

Absorbed Current max (A)	1,40	Voltage (V)	220-240
Absorbed Power max (W)	280	Weight (Kg)	10,9
Capacità serbatoio (l)	2,5	Delivery max (l/s)	36
Carica gas refrigerante (g)	65	Delivery max (m ³ /h)	130
Frequency (Hz)	50	Removerd humidity (30 °C; 80% R.H.)	14
Gas refrigerante	R290	(l/24h)	
		Sound pressure level Lp [dB (A)] 1m	42

DIMENSIONS

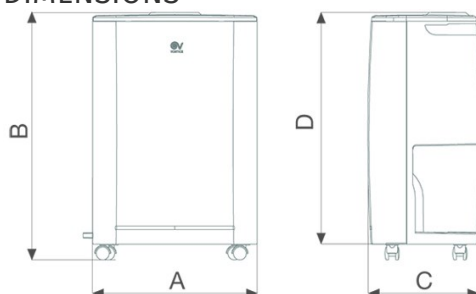

Size A (mm)	300
Size B (mm)	452
Size C (mm)	204
Size D (mm)	425

PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)

Pre & Post Vendita: fax +39 02 90699302

Email prevendita: prevendita@vortice-italy.com

Technical Data Sheet

CODE 26026

DEUMIDO 14 EVO


Portable dehumidifiers



DESCRIPTION

- Outer casing moulded from ABS thermoplastic resin.
- Water tank moulded from translucent ABS, capacity 2,5 liters.
- Rotary compressor with protection device timed to delay restart by 3 minutes after each shutdown.
- Humidistat allowing preselection of residual moisture level in the room (40%, 50%, 60%, 70% or CONTINUOUS).
- Antifreeze thermostat designed to prevent icing, thereby allowing operation even at low temperatures.
- Removable and washable dust filter to prevent the growth of bacteria and to capture airborne dust particles.
- Activated carbon filter able to keep bad smells.
- Electronic control panel that allows:
 - To switch on/off the unit,
 - To set the relative humidity threshold (40%, 50%, 60% or 70%),
 - To set Timer for the delayed automatic switching off (the delay can be set up to 15 hours).
- Set of indicator lights designed to show:
 - The operating status of the appliance,
 - The functioning mode (RH level or continuous functioning status),
 - The system lockout triggered when water of condensation reaches the maximum limit in the collection tank,
 - The duration of Timer setting.
- A pair of handles and 4 wheels allow an easier repositioning even at full tank.
- It contains R290 gas.
- Hermetically sealed equipment.

ACCESSORIES



FILTRO AI CARBONI ATTIVI FSEK10

Code 21018

PER INFORMAZIONI:

Servizio al Cliente: tel +39 02 90699395 premendo 1 dopo messaggio registrato (consulenza su prodotti e impianti)

Pre & Post Vendita: fax +39 02 90699302

Email prevendita: prevendita@vortice-italy.com